

Lanyards



Loop Lanyard

Every personal fall arrest system requires a high-quality lanyard as a critical link between the anchorage and the harness. To ensure worker safety, Spider lanyards are manufactured with the highest-quality components available.

- Heavy-duty webbing with tamper-resistant locking snap hooks
- Quality workmanship
- Comfortable design that enhances maneuverability

Internal Shock-Absorbing Y-Lanyards



- Reduces snagging, dragging and tripping hazards
- Load indicators on each leg
- Twist lock hook for fast, safe tie-off
- Self-closing
- Self-locking
- Standard gate is rated to 3,600 lbs. (1,632.9 kg); 5,000 lb. (2,268 kg) gate also available
- Larger area to capture anchor point
- User-friendly—easy to use while wearing gloves

Internal Shock-Absorbing Lanyards



- Lightweight 6 ft (1.8 m) lanyard
- Expands 4-6 ft (1.2-1.8 m)
- Reduces snagging, dragging and tripping hazards

Y-Lanyards for 100% tie-off while climbing or transversing



Web Lanyards for lightweight ease



Your choice of styles:

- 3 ft (0.9 m) web for use with rope grabs
- 6 ft (1.8 m) web, standard for 6 ft (1.8 m) tie-off
- Adjustable web, from 4-6 ft (1.2-1.8 m), reduces free-fall distance
- Shown with Shock Pack

Your choice of hooks:


- 5/8 in. (16 mm) Double Lock Hook
- 2 1/4 in. (57 mm) Form Hook
- 2 1/2 in. (64 mm) Ladder Hook
- 1 in. (25 mm) Twist Lock Hook
- Shown with Shock Pack

Refer to table on page 259 for options and part numbers.

6 ft (1.8 m) Web Lanyard with Shock Pack



Steel Cable Lanyards

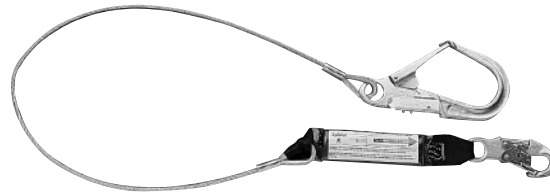

- Steel cable for abrasive conditions, painting, chemical exposure, burning and welding



5/8 in. (16 mm)
Double Lock Hook



Steel Twist Lock Hook



Ladder Hook

Shock-Absorbing Lanyards (Options and Part Numbers)

Match your desired hook with your desired lanyard to find the part number.

	3 ft (0.9 m) Web	6 ft (1.8 m) Web	6 ft (1.8 m) Y Web	6 ft (1.8 m) Sliding	6 ft (1.8 m) Adjustable	6 ft (1.8 m) Loop Web	6 ft (1.8 m) Internal Web	6 ft (1.8 m) Retractable Internal Web	6 ft (1.8 m) Cable Web	6 ft (1.8 m) Internal Y Web	6 ft (1.8 m) Retractable Internal Y Web
Double Lock Hook	701370-1	701367-1	701368-1	701369-1	701238-1	701226-1	701231-1	701234-1	N/A	701399-1	701401-1
Steel Twist Lock Hook	701165-1	701167-1	701166-1	N/A	701239-1	701225-1	701232-1	701235-1	701259-1	701399-2	701399-14
Ladder Hook	701272-1	701280-1	701279-1	N/A	701275-1	701274-1	N/A	701277-1	701258-1	701399-4	701402-1

Force 2 Lanyards for wind and industrial applications

- Used when anchorage point is at or below foot level
- OSHA/ANSI approved for 12 ft. (3.7 m) free fall with 1,800 lb. max force
- Required for all workers 310-420 lbs. (140.6-190.5 kg)

For more information, call: 1-877-774-3370