

ST-19E Demountable Spider




Self-contained work cage easily disassembles without special tools to pass through a 20 in. (508 mm) diameter opening.


- Bolted, lightweight aluminum frame is ideal for limited access work in boilers, ships, tanks and stacks.
- Built-in overload device and overspeed brake
- Reinforced midair transfer point and wear plates at base
- Optional 2 ft (0.6 m) SA-1052 and 3 ft (0.9 m) SA-1053 flydecks
- Available in rental fleet and for sale on a special order basis

Specifications:	ST-19E
Gross Load Capacity:	1,000 lb (453.6 kg)
Dimensions:	30 x 23 x 70 in. (762 x 584 x 1,778 mm)
Weight:	205 lb (93 kg)
Travel Speed:	18 ft/min (5.5 m/min)
Voltage Options:	115V single phase (50 and 60Hz models available)
Wire Rope Capacity:	350 ft (106.7 m)
Wire Rope Size and Construction:	5/16 in. (8 mm) Seale Construction 6 x 19
Construction:	Aluminum and steel

For welding installation details, see pages 63-64.

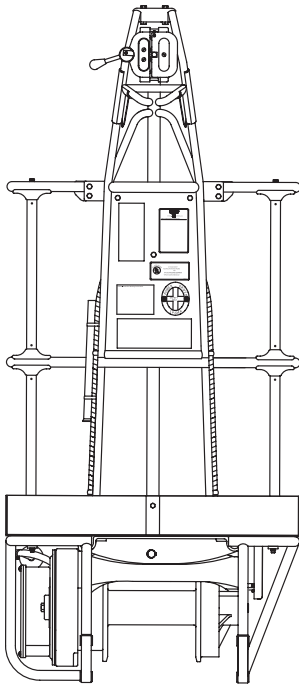


ST-19E

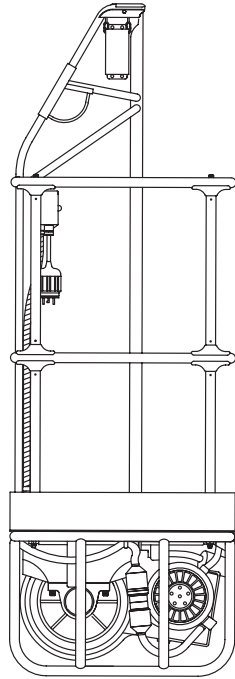


70 in. (1,778 mm)

Frequently used accessories:

- SA-3065 Ground Dolly on page 67.
- SA-1002 Transfer Chain on page 125.
- 702049 Whip on page 45.

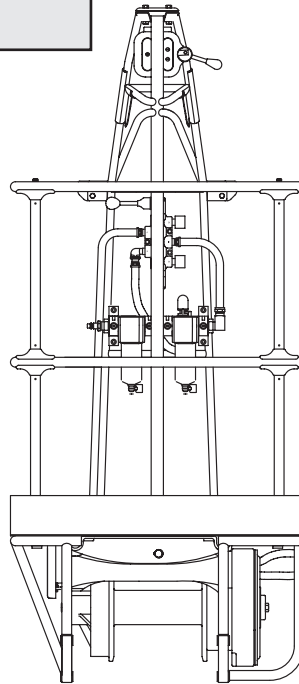

ST-19A

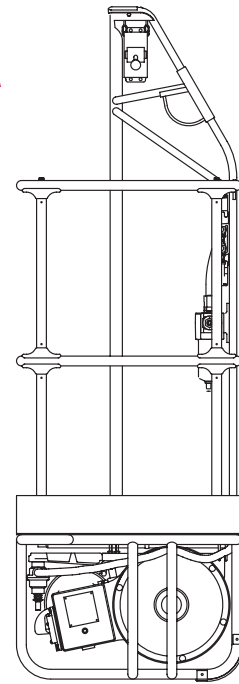

70 in. (1,778 mm)