


Circular Modular Platforms

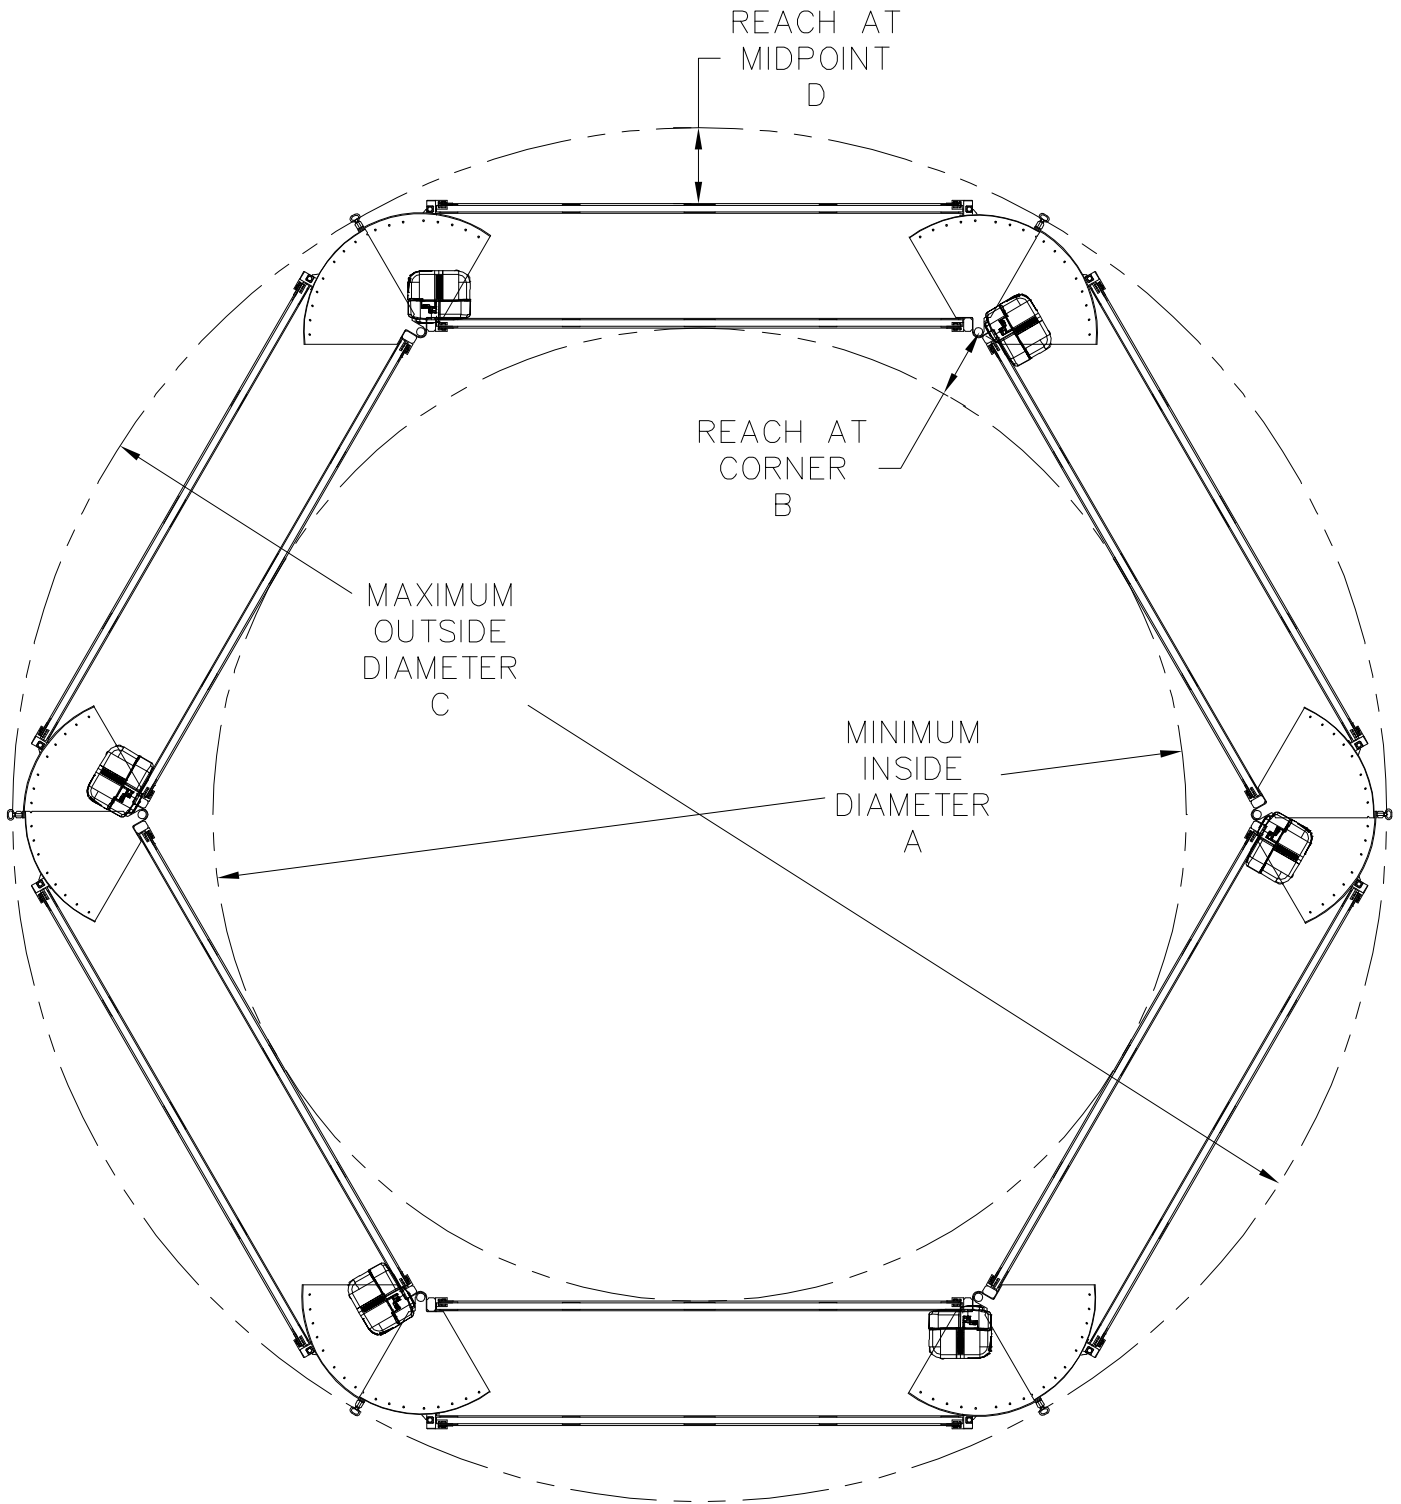

*Don't see the configuration you need?
Call your Spider professional.*

See page 81 for dimensions.

Circular Modular Platform Typical Configurations

Drawing Number	Length of Sides (Ft)	No. of Sides	Hoists (1,000 lb)	Platform Weight (lb)	Live Load (lb/Pers)*	Min. Inside Diameter A		Reach at Corner B	Max. Outside Diameter C		Reach at Midpoint D
						ft	in.		ft	in.	
RND3-4	3	4	3	1,272	1,200/4	3 ft	9 in.	7 in.	10 ft	2 in.	10 in.
RND3-5	3	5	3	1,445	1,200/4	5 ft	1 in.	5 in.	11 ft	3 in.	9 in.
RND5-4	5	4	4	1,172	1,200/4	5 ft	9 in.	12 in.	13 ft	0 in.	15 in.
RND3-6	3	6	3	1,338	1,200/4	6 ft	5 in.	4 in.	12 ft	4 in.	7 in.
RND5-5	5	5	3	1,545	1,200/4	7 ft	10 in.	9 in.	14 ft	8 in.	12 in.
RND8-4	8	4	4	1,448	1,200/4	8 ft	9 in.	19 in.	17 ft	4 in.	23 in.
RND3-8	3	8	4	1,784	1,200/4	8 ft	10 in.	2 in.	14 ft	6 in.	5.5 in.
RND5-6	5	6	3	1,458	1,200/4	9 ft	10 in.	7 in.	16 ft	4 in.	10 in.
RND10-4	10	4	4	1,416	1,200/4	10 ft	9 in.	24 in.	20 ft	2 in.	28 in.
RND8-5	8	5	5	1,810	1,500/5	12 ft	0 in.	15 in.	19 ft	10 in.	18 in.
RND5-8	5	8	4	1,944	1,200/4	13 ft	8 in.	4 in.	19 ft	9 in.	8 in.
RND13-4	13	4	4	1,692	1,200/4	13 ft	10 in.	32 in.	24 ft	5 in.	36 in.
RND10-5	10	5	5	1,770	1,500/5	14 ft	10 in.	18 in.	23 ft	2 in.	22 in.
RND8-6	8	6	6	2,172	1,800/6	15 ft	1 in.	12 in.	22 ft	5 in.	15 in.
RND15-4	15	4	4	1,772	1,200/4	15 ft	10 in.	37 in.	27 ft	3 in.	40 in.
RND10-6	10	6	6	2,124	1,800/6	18 ft	7 in.	15 in.	26 ft	4 in.	19 in.
RND13-5	13	5	5	2,115	1,500/5	18 ft	11 in.	24 in.	28 ft	4 in.	28 in.
RND8-8	8	8	8	2,896	2,400/8	21 ft	0 in.	8 in.	27 ft	3 in.	12 in.
RND15-5	15	5	5	2,215	1,500/5	21 ft	8 in.	28 in.	31 ft	9 in.	32 in.
RND13-6	13	6	6	2,538	1,800/6	23 ft	10 in.	20 in.	32 ft	5 in.	24 in.
RND10-8	10	8	8	2,832	2,400/8	25 ft	10 in.	10 in.	32 ft	10 in.	14 in.
RND15-6	15	6	6	2,658	1,800/6	27 ft	3 in.	23 in.	36 ft	5 in.	27 in.
RND13-8	13	8	8	3,384	2,400/8	33 ft	2 in.	14 in.	40 ft	10 in.	18 in.
RND15-8	15	8	8	3,544	2,400/8	37 ft	12 in.	16 in.	46 ft	1 in.	20 in.

*Load must be distributed. Higher live loads may be possible with more requirements for distributing loads.

Contact your Spider professional.