


TYPE 3 - RUBBER TIRE ROOF MACHINE WITH MULTI-LAYER DRUM HOIST

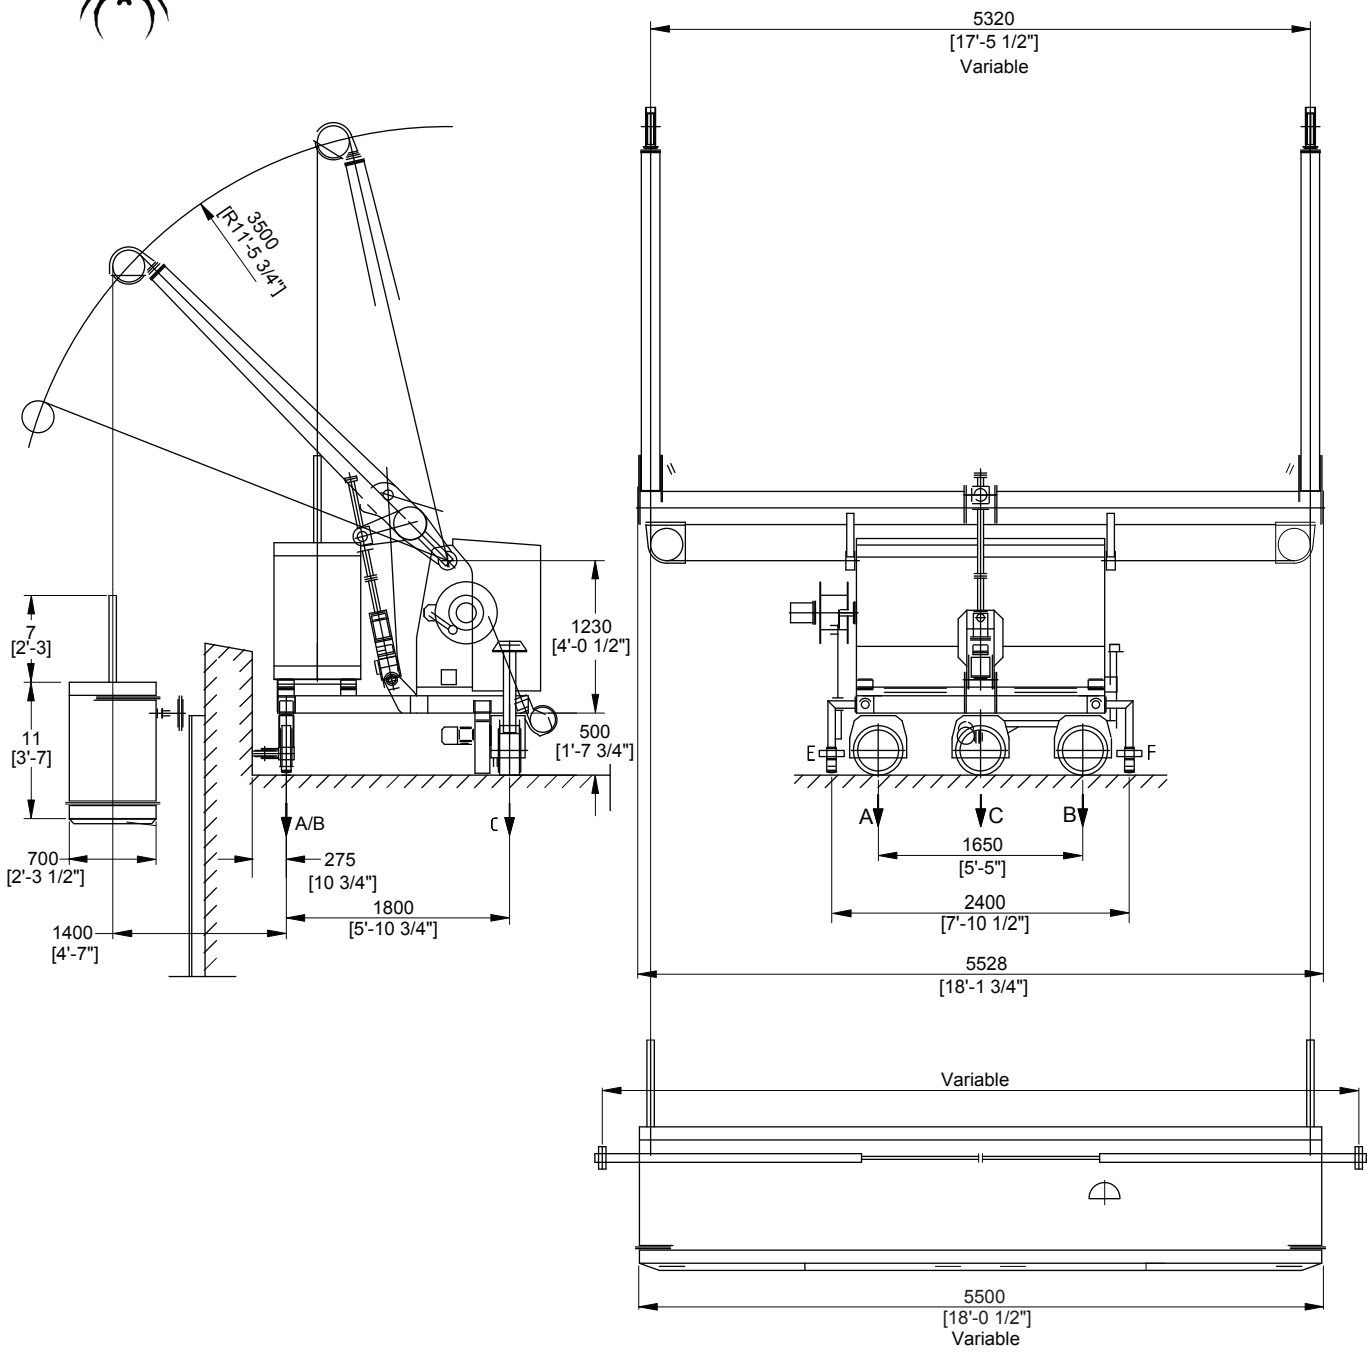

Description:
 The Type 3 trackless standard system for use on roofs with load bearing concrete runways. The systems uses large-size wheels with Polyurethan tires and requires nether tracks nor guides rails. The roof unit moves independently on rubber-tires contact rollers along inside edge of the parapet.

Spider Permanent Installations
 365 Upland Drive
 Tukwila, WA 98188 USA

Phone: (206) 575-6445 / Fax: (206) 575-6240
 E-mail: spiderpi@safeworks.com
 Internet: www.SpiderStaging.com/pi

THIS DATA SHEET AND ALL REPRODUCTIONS ARE THE PROPERTY OF SPIDER® ALL DIMENSIONS AND FIGURES SHOWN ARE FOR GENERAL INFORMATION ONLY AND SHOULD BE CONFIRMED AND PERMISSION OBTAINED FROM SPIDER BEFORE BEING USED FOR DESIGN OR CONSTRUCTION PURPOSES. ALL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE. SPIDER® IS A DIVISION OF SAFEWORKS™ LLC