


New Product Alert – Rigging Device

Corner Support Post 701877-1



Extends reach of current outrigger beams by moving fulcrum point forward into building corners.

- For use in building corner applications to shorten the reach needed from available beams
- For use with all 4x4 SA-1088, 6x4 700751-1 and 5x5 8-0217-x series beams, 700809-1 & 700819-1 6 inch square tube beams as is or to SA-3728 pipe beam with 702012-1 Outrigger Beam Support
- Attaches to: OSBF Frame A-11393, Rolling Outrigger Gentries 701960-1 and 701960-2
- Enables the use of corner-mounted hoist in the 008812-1 Adjustable Corner Adapter to improve stability, load capacity, and load distribution on angled platforms
- Can be used with 2 stacked OSBF frames at maximum height
- Heavy duty steel construction
- Thorough labeling ensures worry-free installation
- Height completely adjustable from 5ft 5 in to 9ft 4in
- Built by Spider in the USA

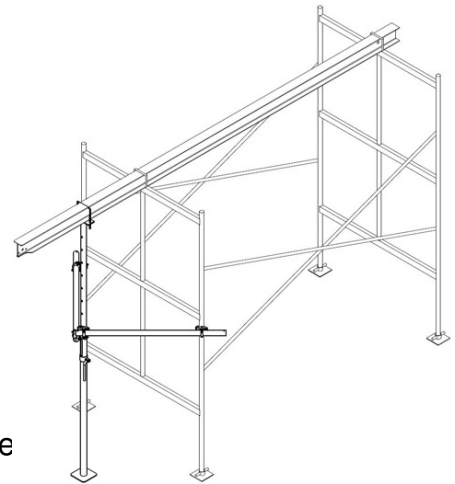

Standard Scaffold Clamp allows attachment to: OSBF Frame A-11393, 701960-1, 701960-2, and gantry frames.

Load Rating: Up to 1500 lbs

Weight: 94 lbs in 3 pieces, heaviest piece = 54 lbs

Outreach: see beam specifications

Call Spider today to discuss your rental needs: (877) 774-3370

