New Product Alert – Rigging Device

704258-1 Down Under Assembly

Engineered system to locate the rigging point down a vertical span and under a horizontal distance to access walls under deep cornices, caps or architectural features. Down height available is adjustable from 48 to 96 inches, and horizontal (under) reach is 36 to 60 inches with a 1500 lb. maximum hoist capacity.

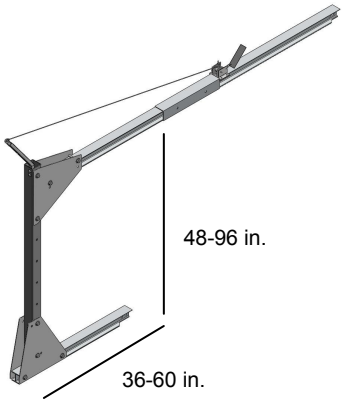

- Simple system to set-up and deploy saves time
- Mechanical winch allows for no-power deployment
- With optional drill to speed installation, set-up takes minutes.
- More stable construction improves worker confidence and production rates
- More under reach than competitors: Spider offers 5 ft vs. their 4 ft.
- Step by step set-up instruction labels eliminate guesswork
- Engineered and fully tested to meet ANSI SPS 1.1
- Made by Spider in the USA

Outreach:	**Down: 48-96 in.** **Under: 36-60 in.**
Max. hoist capacity:	**1500 lbs.**
Weight:	**291 lbs.**
Heaviest piece:	**49 lbs.**
Aluminum and steel construction	

For use with 8-0217-x Outriggers on 701960-1 gantry frames, OBSF, and suitable scaffold frames.

Longer down lengths available by special order.

Call Spider today to discuss your rental needs: (877) 774-3370