

Spider works on wind turbines globally

More than 60 years of experience in moving people to where the work is and managing our own equipment fleet drives better product designs and practical training solutions.

Reliable... Fully Code Compliant... Trusted... Experienced... Market Leader



360° BLADE ACCESS PLATFORM

Access Sales, Rentals, Labor Services, Safety Solutions and Training for Wind O&M Professionals.

25 locations in the Americas




MODULAR, STABLE, SIMPLE

Spider's 360° Blade Access Platform is user-inspired design that eliminates fussy powered controls and expensive mobilization. This modular inspection platform is simple to install, and designed to reconfigure for blade or tower work access with adding minor changes to components.

- Improved stability in a simpler, easier to operate design
- Lower cost to transport and mobilize equipment
- Available to rent and economical to purchase
- Configurable to alternate tower or small area blade work needs with simple modular concept



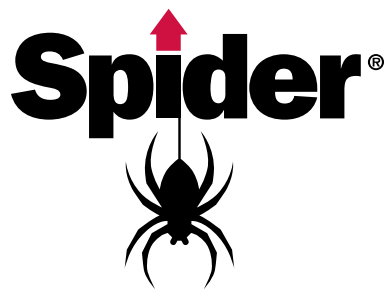

Whether you're looking to rent wind access solutions or to add to your equipment fleet, Spider has the product and service solutions available across the country to get the work done productively. Spider partners with the best-managed contractors in North America and beyond. These owners and leaders demand reliability and they put their trust in Spider.

MODULAR

Design adapts to blade profiles

Convenient to reconfigure for inspection or tower access

More easy to transport – breaks down to fit in pick-up trucks, making it easier to meet DOT rules

Trusted components easily bought or rented

STABLE

Productive platforms for 360° Blade Access

Increased production rates

Confident professionals

SIMPLE

US-made, UL-Listed

Easy to source, operate and own

Easy manual push-out – no complex design to fail

Service, support & spare parts widely available

Available for rent - 25 locations in the Americas

Project rental and labor support as you need it



SPECIFICATIONS:

Platform Capacity: 750 lbs maximum* (live load)

Platform Weight: 2210 lbs minimum

Platform Dimensions: 10 ft 9 3/16 in x 13ft 7 in outside**

Standard opening to receive blade: 10 ft 2 in x 5 ft 10 in**

Total Platform Height: 9 ft 2 in

Minimum Blade to Tower distance: 3 ft 7 in

Dimensions vary with configuration selected

Handrail Height: Max 42 in above floorboards, Min 31 in

* Canadian platforms use alternate load ratings.
 ** Standard configuration. Additional sizes available.

SC1500 HOIST FEATURES:

Integrated Overspeed and 2nd Wire Rope Safety Device for Dual Wire Rope Operation

SC1500 Electric 208V, 1500 lbs, single phase hoist

Industry-leading voltage and operating-cost performance

Hoist Capacity: 1500 lbs

Travel speed: 35 feet/minute

Package to power 110V hand tools

Aluminum grated or dimple-deck platforms available