

Spider® SC1500-GHS

The first UL listed, 1,500-lb personnel traction hoist for guided high speeds (GHS) in North America improves productivity and safety for elevator applications.

- › High lifting capacity and speeds
- › Best low voltage performance in its class
- › Easily visible, continuous voltage readouts from on-board voltage meter
- › Simple operation with remote pendant controls
- › Maximized uptime with unmatched support from the industry's largest branch network



› SC1500-GHS Specifications



Capacity

- › 1,500 lbs (680 kg)

Travel Speed

- › up to 70 fpm (21 mpm)

Power

- › 208V, 60 Hz, single phase

Operating Range

- › 195-229 run volts

Amperage at Working Load Limit

- › 18-20 amps


Wire Rope

- › 5/16 in. (7.9 mm) 5x26

Weight

- › 153 lbs (69.4 kg)

Spider® SC1500-GHS

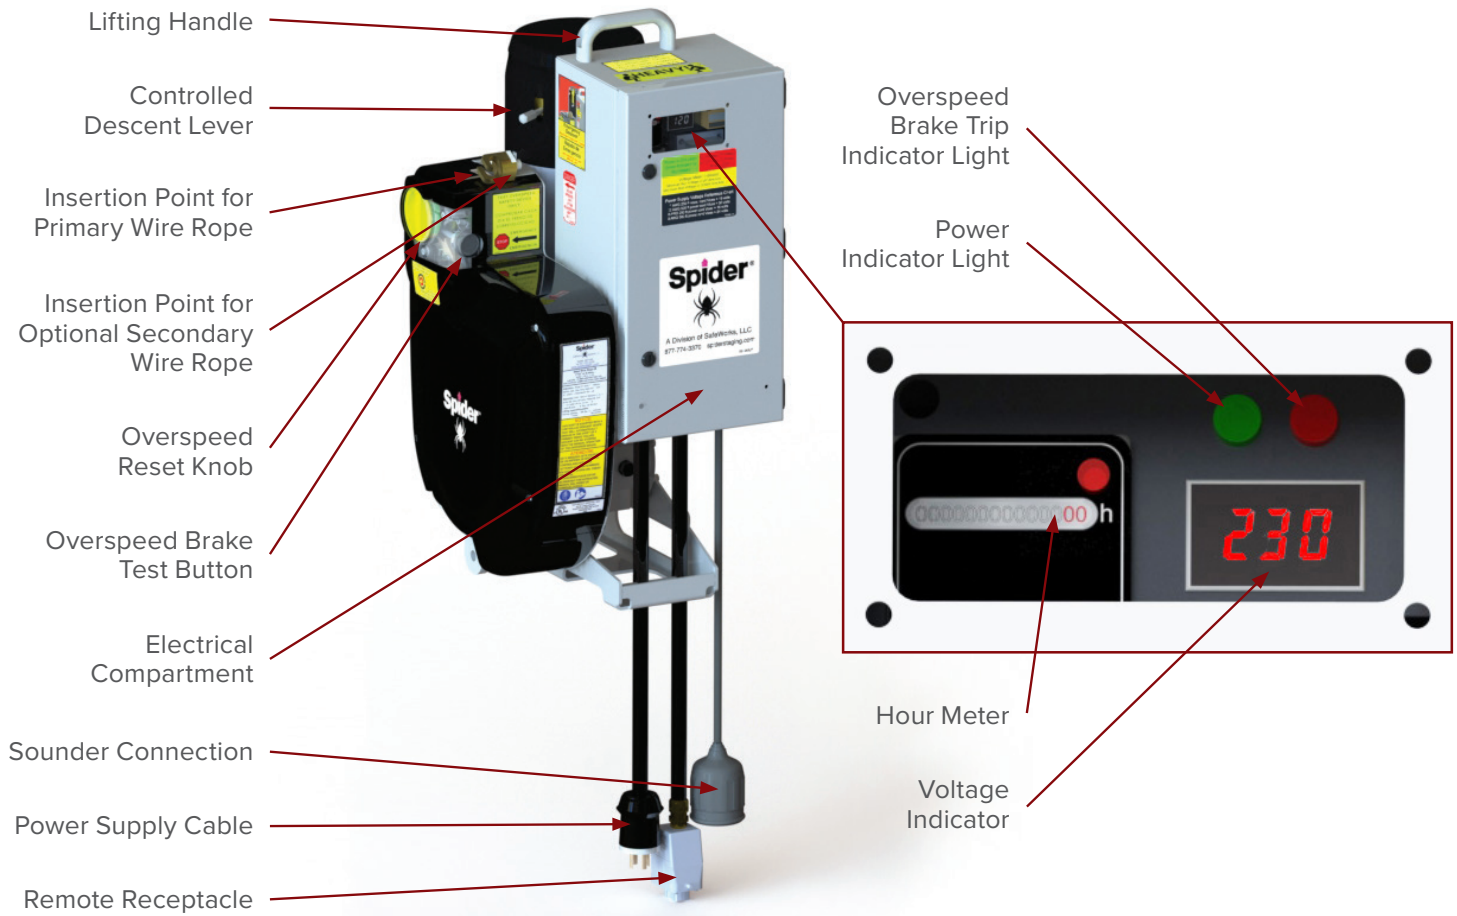

> Why UL Matters

Spider designs, engineers, and tests its hoists in accordance with the Underwriters Laboratories UL1323 standard for hoists as required under OSHA 1910.28(i)(1) and (g)(3) and 1926.451(d)(13) to ensure customers receive products that are manufactured, maintained, and serviced according to consistent standards for increased safety.



Since 1947, Spider has led the suspended powered access industry with innovative solutions for commercial construction, elevator, infrastructure, power generation, offshore and wind energy markets throughout the Americas. With highly specialized design expertise, fully integrated manufacturing and engineering, ISO 9001:2015 certification, and a national network of sales, service and 24/7 technical support capabilities, Spider provides industry-leading, reliable, turnkey access solutions inspired by customer input.

©2018 All rights reserved. SPI 014



Spider® By BrandSafway
 365 Upland Dr. | Seattle, WA 98188
 T: 1 877 774 3370 | www.spiderstaging.com

BRAND SAFWAY™

brandsafway.com