

## Spider UpPro 1009 UL35

As the first UL-listed for man riding, single phase, 2,200-lb hoist in North America, Spider's UpPro traction hoist will increase uptime, productivity, and safety for all your heavy lifting applications.

Fully integrated suspended access manufacturing and engineering

Highly specialized design and support expertise

Custom engineered solutions that benefit from complex local safety code expertise

Certified Quality Systems

Operational excellence to drive reliability and consistency across the Americas

24/7 technical support



SPIDER UPPRO 1009 UL35


Global presence with 25 rental and sales locations in the Americas



### With nearly seven decades of knowledge and experience

in putting people to work at height safely and productively, Spider offers the first UL-listed for man riding, single phase, 2,200-lb traction hoist on the market, specifically designed for heavy lifting applications including elevator installations and modernizations.

- High lifting capacity of 2,200 lbs
- Optimal power range, from 180 to 250 line voltage, to eliminate most power supply issues
- Improved reliability and operator safety with built-in overload, externally mounted Overspeed Safety Lock (OSL), and optional Inclination Safety Lock (ISL)
- Self-rescue of workers and platforms from controlled descent feature
- Optimal power management and soft starts and stops with variable frequency drive
- Maximized uptime with rapid delivery, service, and repair from 25 branches in the Americas

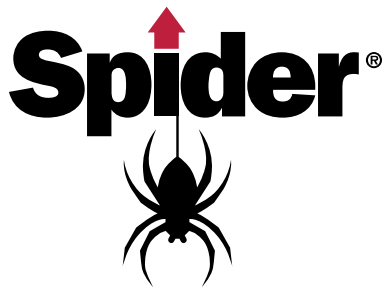

## Spider UpPro 1009 UL35


The Spider UpPro 1009 UL35 leads our full line of lifting solutions for elevator and other heavy lifting applications. And as the **FIRST UL-listed** for man riding, single phase, 2,200-lb hoist for North America, Spider continues to lead the market in providing innovative, reliable, safe solutions.



### WHY UL MATTERS

Spider designs, engineers, and tests its hoists in accordance with the Underwriters Laboratories UL1323 standard for hoists as required under OSHA 1910.28(i)(1) & (g)(3) and 1926.451(d)(13) to ensure customers receive products that are manufactured, maintained, and serviced according to consistent standards, making them safer than products listed by other labs.

Not all manufacturers invest in UL listing. Spider does. To verify our listing status, scan the QR code below and enter SafeWorks in the company field:

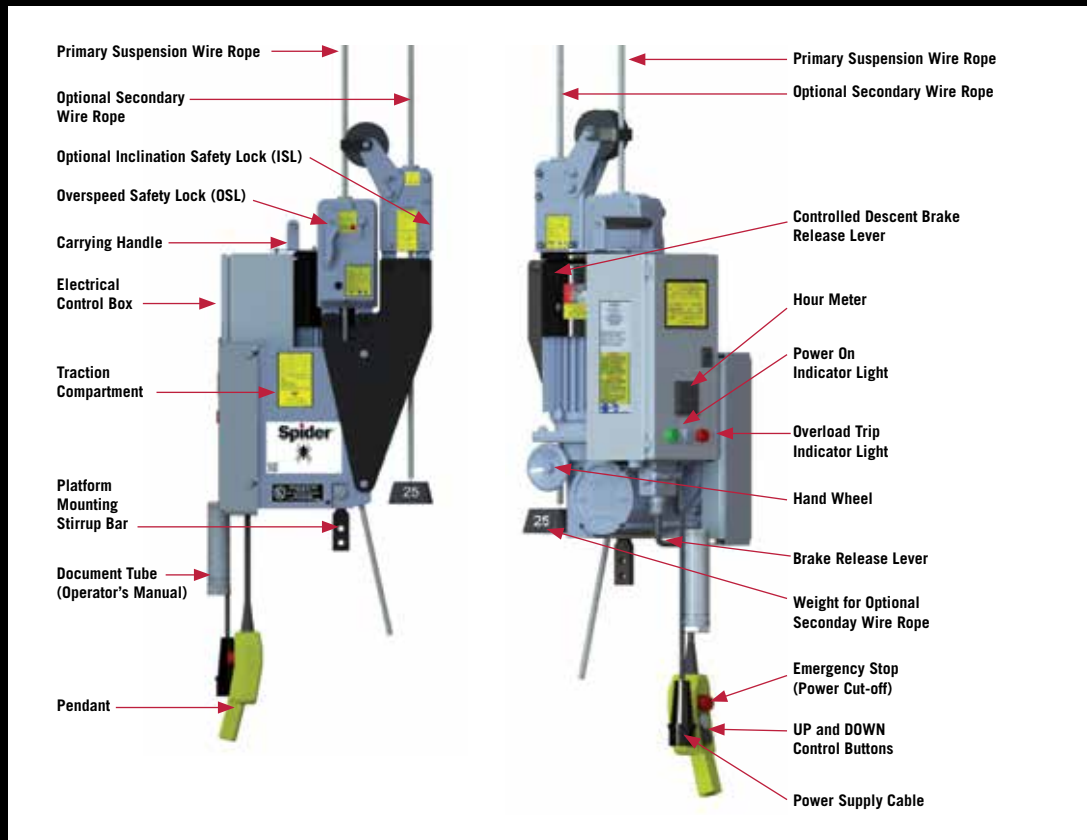

## Spider UpPro P1009 UL35 Specifications

	UpPro P1009 UL35
Capacity	2,200 lbs
Travel Speed	30 ft/min
Power	230V +10%, -20%; 60 Hz, 1-phase
Amperage at working load limit	12 Amps
Wire Rope	3/8 in. with 15,100 lb breaking strength
Weight	136 lbs (not including safeties)
Dimensions	20 in. wide by 38 in. tall from top of bracket to bottom of mount

We listen to our customers and continually develop new products with improved features based on your requests.

