



NOTES:

- 101 5/16 WIRE ROPE 5X23 WS DG XXIP FIBER CORE. MINIMUM BREAKING STRENGTH 11,500 LB. WEIGHT = .16LB/FT
- 102. FOR USE ON ALL SPIDER DRUM HOISTS (ST-180, ST-17, ST-19, ST-26) FOR CONDITIONS THAT ARE REQUIRED TO COMPLY WITH 29CFR1926 SUBPART L (CONSTRUCTION SITES) AND 29CFR1910 SUBPART D (GENERAL INDUSTRY).
- 103. MAY NOT BE SUITABLE FOR USE WHERE 29CFR1910 SUBPART F APPLIES (PERMANENT POWERED PLATFORMS FOR EXTERIOR BUILDING MAINTENANCE).
- 104 29CFR1926 SUBPART L 1926.451(d)(6) AND 29CFR1910 SUBPART D 1910.28(f)(12) REQUIRES 4 WRAPS OF THE SUSPENSION WIRE ROPE TO REMAIN ON THE DRUM AT THE LOWEST POINT OF SCAFFOLD TRAVEL. A 25FT MARGIN WILL ENSURE COMPLIANCE WITH THESE REQUIREMENTS AND THAT THE ROPE WILL WIND ONTO THE DRUM CORRECTLY UNDER MOST CIRCUMSTANCES.

ROPE PART NUMBER	RECOMMENDED ALLOWABLE DROP HEIGHT (FT) 104	APPROXIMATE WEIGHT (LB)
1329 - 75	50	12.65
1329 - 100	75	16.65
1329 - 125	100	20.65
1329 - 150	125	24.65
1329 - 175	150	28.65
1329 - 200	175	32.65
1329 - 225	200	36.65
1329 - 235	210	38.25
1329 - 250	225	40.65
1329 - 275	250	44.65
1329 - 300	275	48.65
1329 - 325	300	52.65
1329 - 350	325	56.65
1329 - 375	350	60.65
1329 - 400	375	64.65
1329 - 425	400	68.65
1329 - 450	425	72.65
1329 - 500	475	80.65
1329 - 525	500	84.65
1329 - 550	525	88.65
1329 - 600	575	96.65
1329 - 650	625	104.65
1329 - 700	675	112.65
1329 - 750	725	120.65
1329 - 800	775	128.65
1329 - 850	825	136.65
1329 - 900	875	144.65
1329 - 950	925	152.65
1329 - 1000	975	160.65

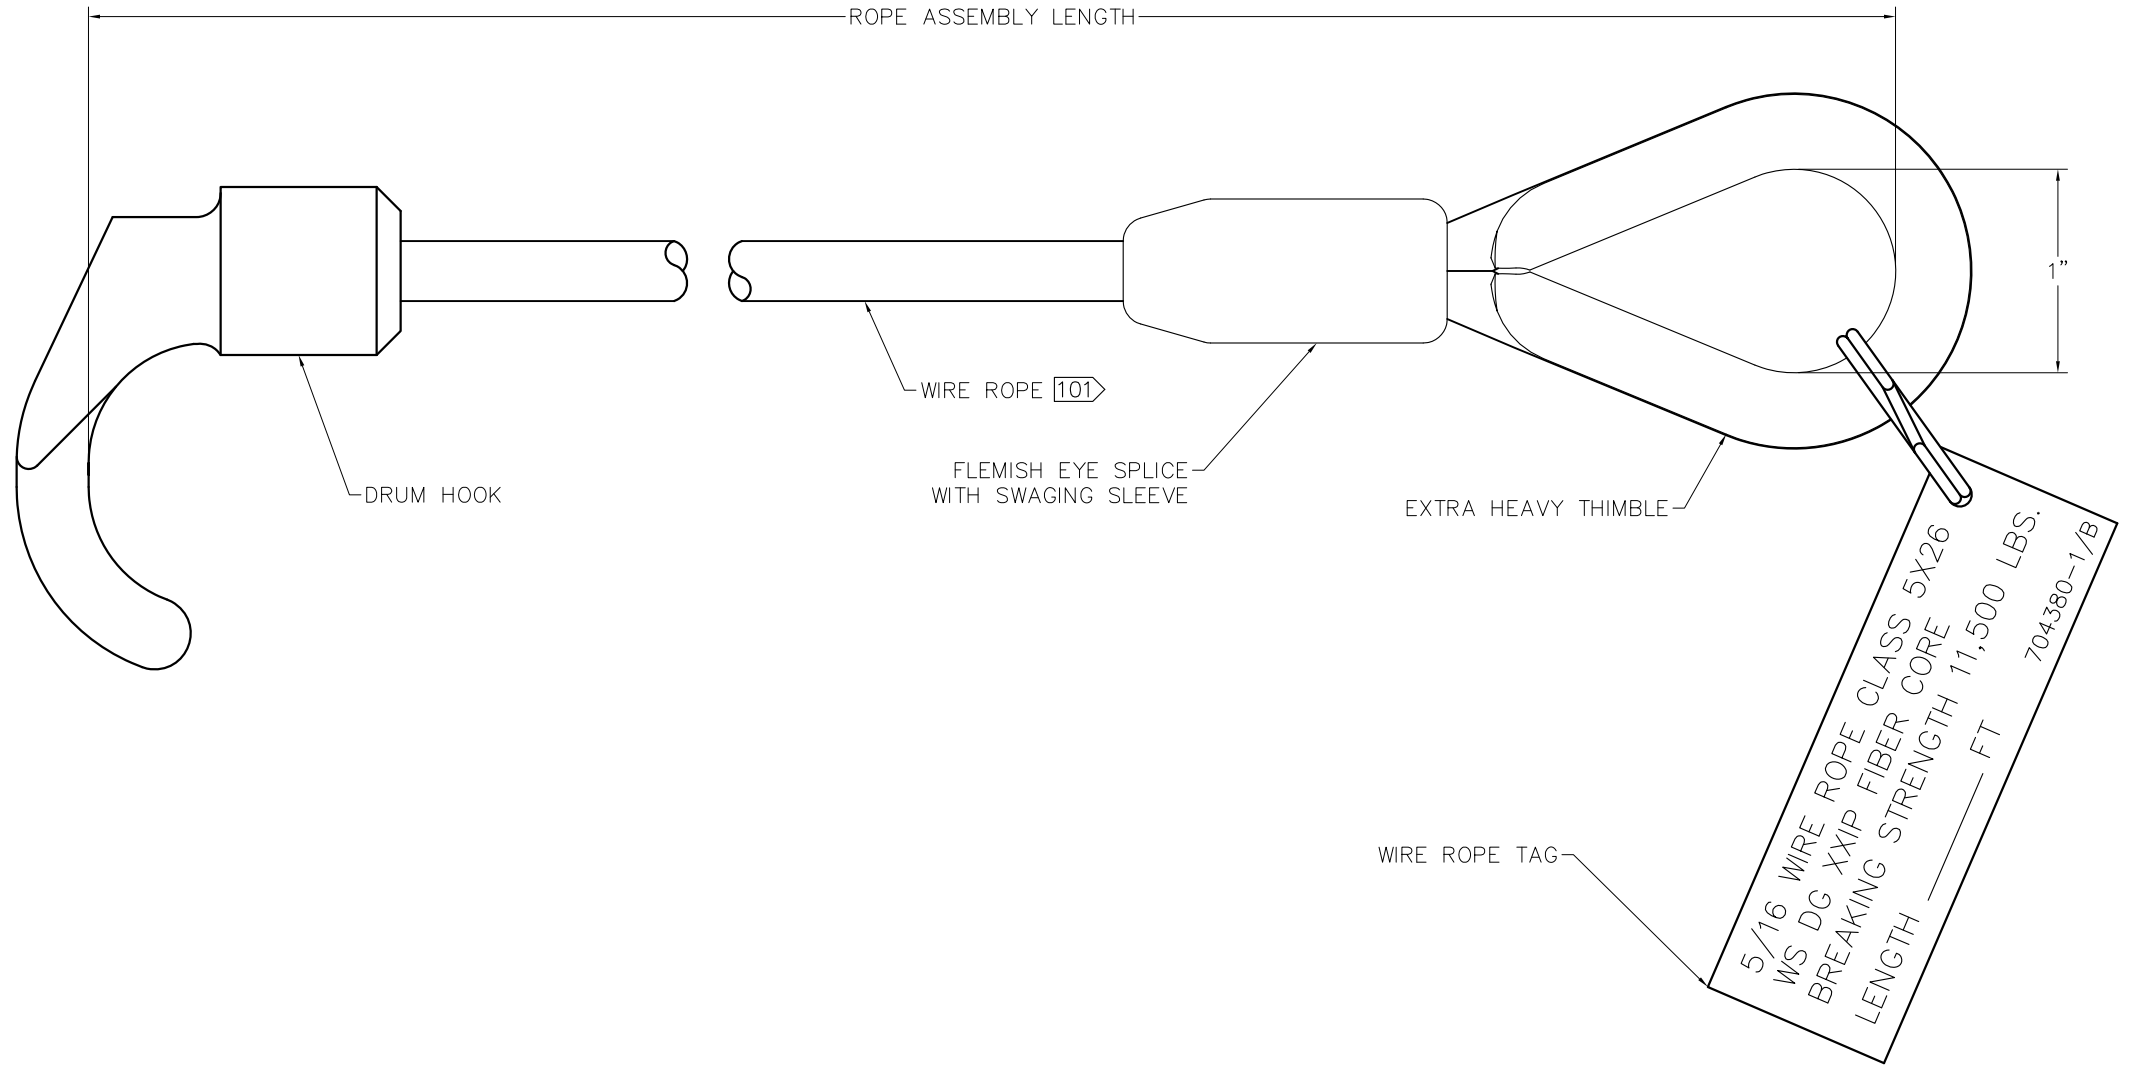

REV 1	ECO BETA RELEASE	DATE 2013/11/14	BY TSM	CK JTA
 A Division of SafeWorks, LLC 365 UPLAND DRIVE SEATTLE, WASHINGTON 98188		MATERIAL:		
		THIS DRAWING IS THE PROPERTY OF SAFEWORKS, LLC. AND IS NOT TO BE COPIED OR REPRODUCED WITHOUT THE WRITTEN CONSENT OF SAFEWORKS, LLC.		
DRAWN BY TSM	DATE 2013/10/24	TITLE 5/16" DRUM HOIST WIRE ROPE ASSEMBLY		
ENG JTA	SCALE D 2"=1'-0"	DRAWING NUMBER GA-1031	1 OF 1	