

Weld Down Pedestal for Mobile Socket

723738




Description



Mobile pedestals are used in conjunction with mobile sockets to elevate the davit from the base roof equipment. Heights will depend on connection, roof structure, and parapet wall height.

Weld Down: Used when welding directly to building structure.

Part Number Logic



Part Number Example:
723738-12: 12" high weld down pedestal

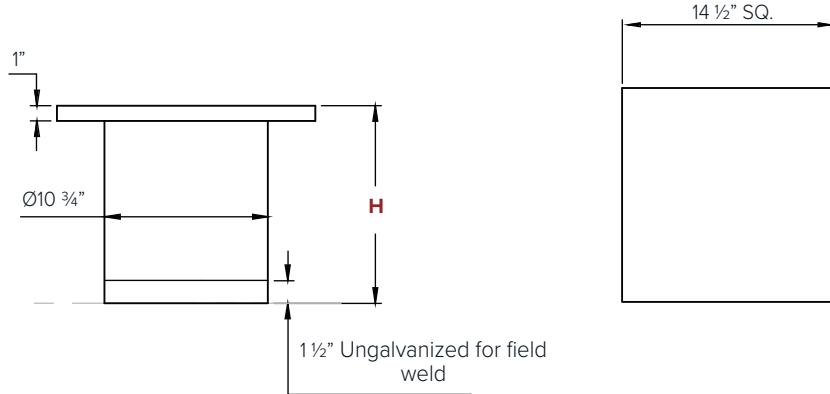

Weld size/type and supporting structure as required by project specifications or qualified person.

Part Number	723738
Function	Elevate davit to roof connection via welding
Moment Rating	127,500 in-lb
Dimensions	Length and Width: 14" Height (H): 7" - 25" in 1" increments <small>*Contact Spider for non-standard height options</small>
Material	Plates: ASTM A572 Steel GR50 Pipe: ASTM A53 Grade B Hot Dipped Galvanized (ASTM A123)
Compatible with	723642 Mobile Socket
Compliance	Welding by AWS certified welders to AWS standards. Conforms with OSHA 1910.66, CAL/OSHA title 8, ASME A120.1-2014. Conforms with NYSDOL Advisory Standard 101. (with foam fill post field welding)

Spider® is a division of SafeWorks, LLC. This data sheet and all reproductions are the property of SafeWorks, LLC including all information contained herein and any information derived from this data sheet. Users are solely responsible for the safe and proper use of all products or any derivative products. This data sheet is only intended for illustrative purposes and should not be relied upon in place of an operating manual or a competent user trained to properly use the products depicted. All dimensions and figures shown are for general information only and should be confirmed and permission obtained from SafeWorks LLC before being used for design or construction purposes. All information is subject to change without notice. SafeWorks LLC disclaims all liability from any use or misuse of the information contained herein.