Top Rotating Portable Davit 723113 & 724270




Description

Part Number Logic 723113 - (XXXX) - (XXX) - (XXX)

Base Part Number

723313 (2 pin) or 724270 (4 pin)

Portable davits are commonly used to suspend a permanently installed platform from the roof structure for facade maintenance over the life of the building. Davit is secured into socket with either 2 long pins or 4 short pins, depending on the roofing constraints at the socket base.

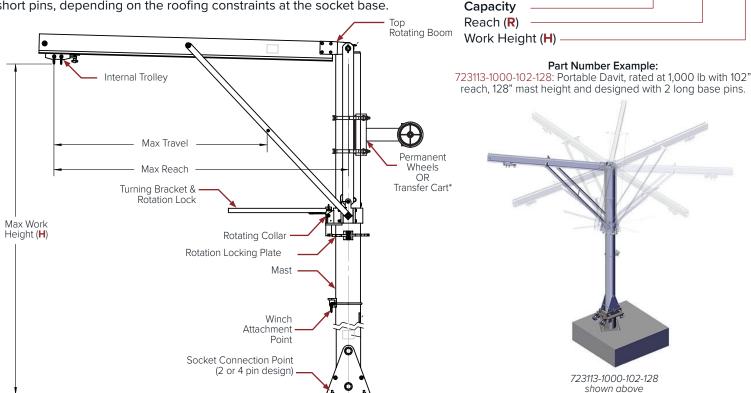

Part Number	723113 & 724270				
Weight	Dependent on configuration. Largest davit is under 300 lb				
Work Height	Mini	mum : 8'-2" (98")	Maximum: 11'-8"	' (140") (Available in 6" increm	ents)
Reach	78" or 102"				
Capacity	1,000 lb or 1,250 lb				
Davit Connection	2 long pins (each 16-1/4") 723113 or 4 short pins (each 5") 724270				
Roof Mobility*	Most davits include permanently installed wheels. Part numbers below include a removable transfer cart (723679-1) instead. xxxxxx-xxxx-102-134 & xxxxxx-xxxx-102-140				
Material		Mast & Boom: 6	6061-T6 Aluminum	Hardware: Stainless Steel	
Compatible with	Sockets: 723642, 723561, 723657, 723667, 723668	Pede: 723734, 723 723	735, 723737,	Erection Winch: 723949-1, 723467-1	Transport Cart 723679-1*
Compliance	Conforms with OSHA 1910.66, CAL/OSHA title 8, ASME A120.1-2014. Conforms with NYSDOL advisory standard 101.				

Spider[®] is a division of SafeWorks, LLC. This data sheet and all reproductions are the property of SafeWorks, LLC including all information contained herein and any information derived from this data sheet. Users are solely responsible for the safe and proper use of all products or any derivative products. This data sheet is only intended for illustrative purposes and should not be relied upon in place of an operating manual or a competent user trained to properly use the products depicted. All dimensions and figures shown are for general information only and should be confirmed and permission obtained from SafeWorks LLC before being used for design or construction purposes. All information is subject to change without notice. SafeWorks LLC disclaims all liability from any use or misuse of the information contained herein.

Spider[®] I 365 Upland Drive, Seattle, WA 98188 | P: 855-457-8513 | F: (206) 575-6240 productsupport@spiderstaging.com | www.SpiderStaging.com