


## Astro E2200

For over 25 years, Astro has provided a safe, robust, and proven lifting solution for a variety of industrial and construction applications. Now the NEXT generation Astro E2200 - the best-in-class 2,200 lb load capacity hoist with integrated safeties - offers a perfect solution for your most challenging heavy ELEVATOR INSTALLATION AND MAINTENANCE project requirements.



ASTRO E2200


Service available worldwide through 24 Spider operation centers

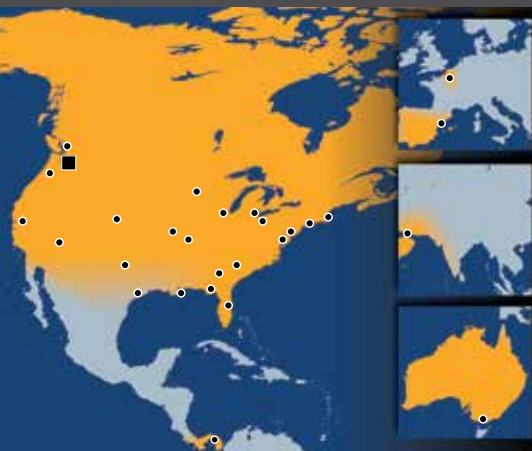

### The Next Generation Astro 2,200 lb

**Robust, Proven, Reliable** - A perfect lifting solution for your heavy elevator projects

Features	Benefits
Integrated safeties	Built into the body of the hoist, ensure operator safety by eliminating risk of omission or poor install, and reduce number of SKUs that need to be tracked in fleet
Longest duty cycle in its class	Provides operator confidence to finish the job
Load dependent traction	Offers extended wire rope life
Robust castings and wire rope path	Minimize hoist damages in case of rope jams
Modular construction	Allows flexibility for power pack replacement and enables quick service time
Ergonomic handles	Make it easy to position on the work platform
Standard visible hour meter	Conveniently located to help determine next service
24 branches in the Americas	Allows faster response time, shorter lead time and reduces cost to inventory spare parts, lowering the total cost of ownership; Also makes project, technical and engineering support available locally 24/7

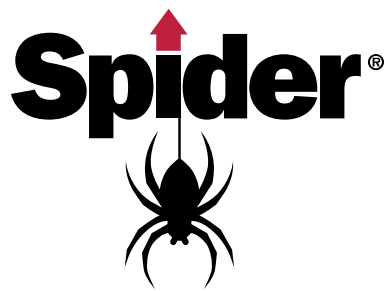


For elevator installation and maintenance, the Astro E2200 offers a safe, productive, and reliable solution. With more than 30,000 traction hoists operating today, only Spider offers a full range of hoists that are tested and approved by Underwriters Laboratory (UL) - just what you would expect from a trusted supplier.

### ASTRO MODELS

Model	E1500 Canada	NEW E2200
Capacity	1500 lb	2200 lb
Wire rope	3/8 5 x 26	3/8 5 x 26 / 6 x 19 / 4 x 26
Power	230V/60 Hz 1Ph	230V or 400V 3P

### NEED CUSTOMIZATION?

Astro E2200 allows simple modification of controls, pendant or mechanical interface to fit your unique elevator installation needs. Just ask your Spider rep.

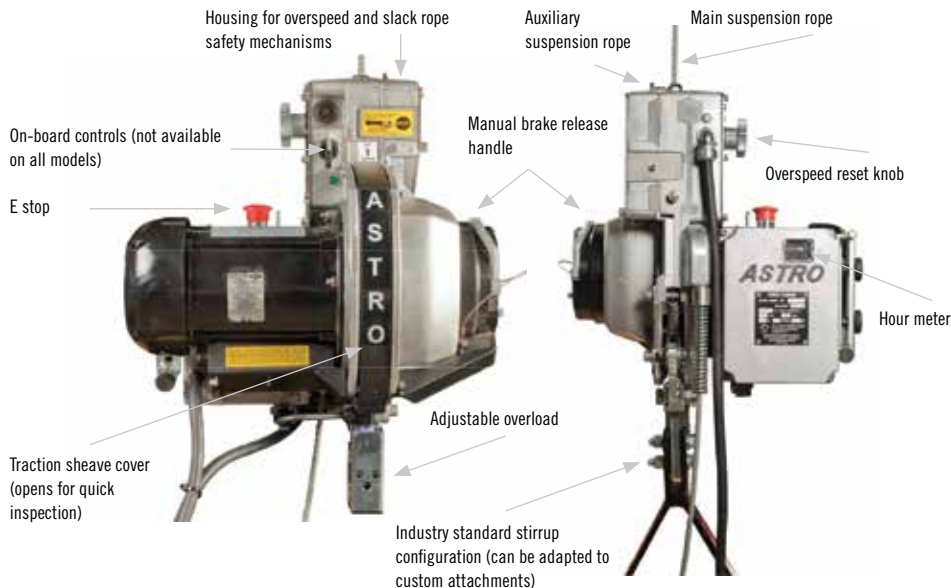

### SPECIFICATIONS

- Capacity:** 2200 lb
- Power:** 230V/60Hz 3Ph or 400V/60Hz 3Ph, 30A circuit
- Travel speed:** Single speed, 35 ft/min
- Wire rope:** 3/8 in., 5x26, 15000 lb breaking strength
- Weight:** 150 lb
- Dimensions:** 24 in. tall x 20 in. wide x 15 in. deep
- Controls:** Hoist mounted controls, Optional pendant
- Noise level:** 80 dBA at 3 ft
- Traction principle:** Load dependent
- Safeties:** Integral to hoist, Overspeed, Slack Rope, Overload
- Top limit switch:** Optional

Available for rent or purchase. Call 877-774-3370 today to order your Astro E2200.



Scan the code for RFQ

